



**GRIFO
NUEVO
SOL**

UPL 95 **14.48**

DIESEL 50 **13.29**

excellium

TOTAL Card

e-fuel



Indicador de Precio ESL01



www.flesac.com

940 410 799 - 974 631 114 @iluminacion.FL

¡Actualízate al LED!

Ya ha quedado en la historia el cambio de precios en acrílico o banner, esta nueva tecnología beneficiará el cambio rápido y efectivo de tus precios además de ser visualmente atractivo para atraer la atención de tus nuevos clientes sin generar costosas facturas por consumo gracias a los beneficios del LED.

IP67 Índice de Protección para polvo y agua.

5mm ovalado Tipo de LED empleado.

60°/90° Ángulo de difusión del LED.

12V Alimentación eléctrica.



INFORMACIÓN TÉCNICA

Potencia WATT		Luminosidad (d/m ²)		Eficiencia Luminica (Lm/w)	Altura Dígito	Cantidad de LEDs por Indicador
MAX	MIN	MAX	MIN			
30	2.14	7375	294	78	300 mm	769

Temperatura de funcionamiento -25°C/+60°C


Temperatura de almacenaje -25°C/+70°C

DIMENSIONES



INDICADOR DE PRECIO - ESL01

- **Cable DC:** Es de 150 cm, con conector hembra de 4 pines.
- **Cable DATOS Control:** Es de 160 cm, con conector hembra de 7 pines.
- **Cable DATOS Pantalla:** Es de 77 cm, con conector hembra de 7 pines. (Stickers de punto blanco).

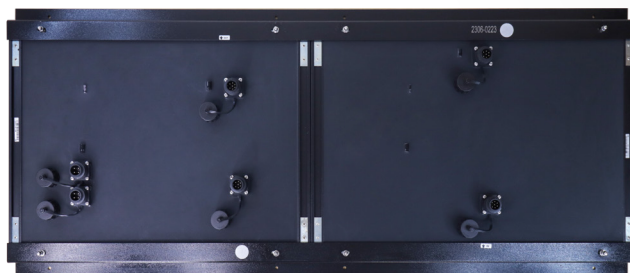

Cable DC




Cable DATOS Control



Cable DATOS Pantalla




IMPORTANTE: Identificar cada uno de los cables descritos para respetar y realizar una correcta conexión entre los indicadores.

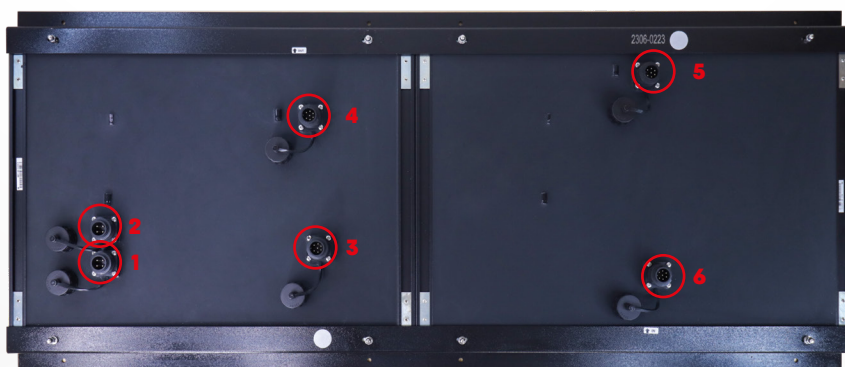

- 1) Conector IN DC (4 Pines)
- 2) Conector OUT DC (4 Pines)
- 3) Conector IN DATOS PANTALLA (7 Pines - Sticker Blanco)
- 4) Conector OUTPUT DATOS (7 Pines)
- 5) Conector OUT DATOS PANTALLA (7 Pines - Sticker Blanco)
- 6) Conector IN PUT CONTROL (7 Pines - Master)

INDICADOR DE PRECIO - ESL01

TOTEM DE 5 PANELES - DOBLE CARA

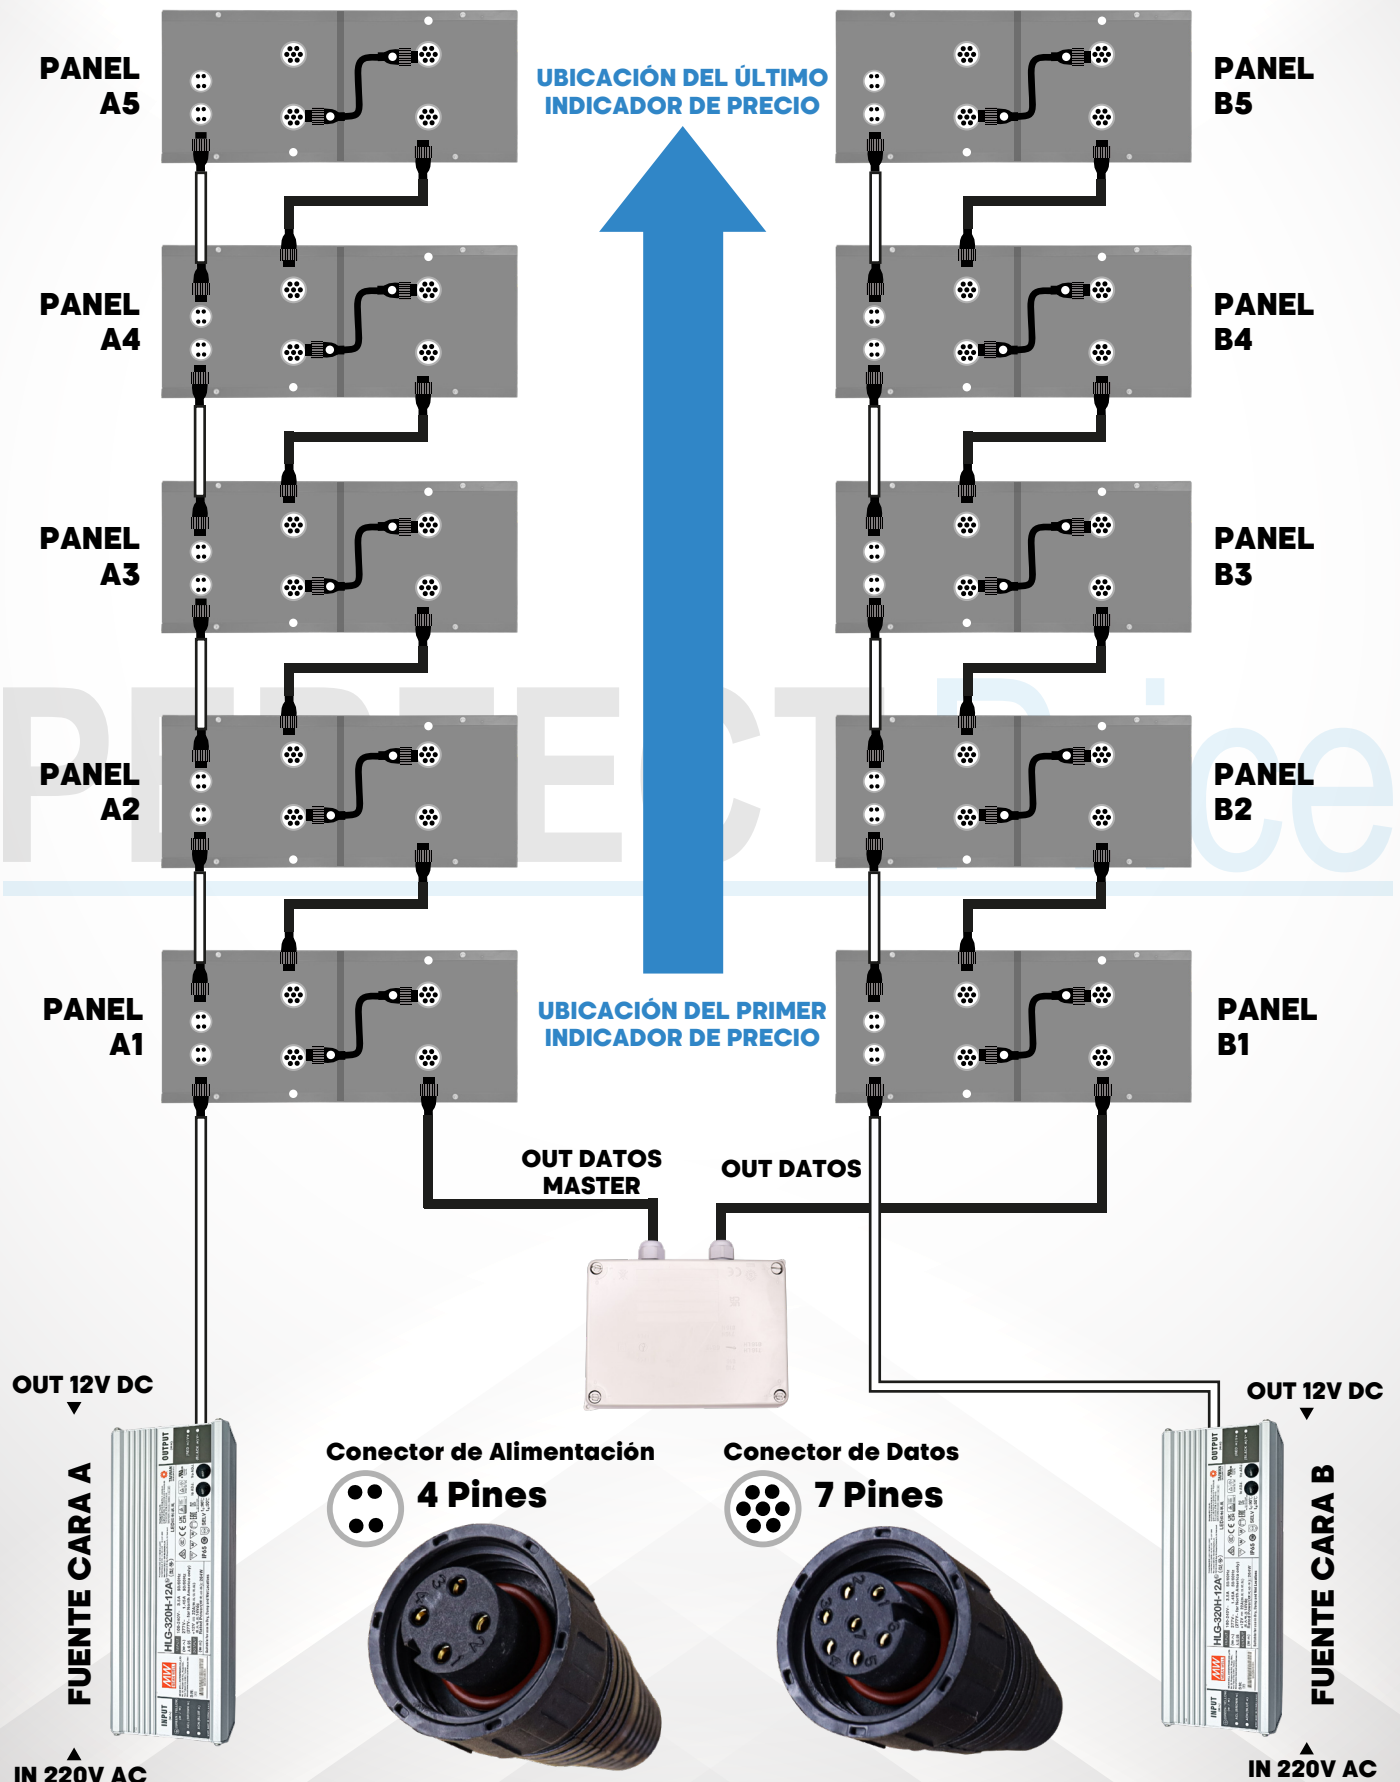

INDICADOR DE PRECIO - ESL01

CONTROL RECEPTOR RF

DISPOSITIVO PARA EL CAMBIO DE PRECIOS



Capacidad	4 Dígitos, 7 Indicadores 1 o 2 caras
Dimensiones	150 mm X 110 mm x 55 mm
Material	Policarbonato
Grado de Protección	IP65
Voltage	12 Vdc
Corriente	500 mA
Temp. de Trabajo	-40°C a +85°C (-40°F a +185°F)
Temp. de Almacenamiento	-40°C a +85°C (-40°F a +185°F)
Puertos de Salida	-----
Puerto Lado 1 (MASTER/CARA A)	Cable de 7 conductores con conectores sellados
Puerto Lado 2 (ESCLAVO/CARA B)	Cable de 7 conductores con conectores sellados
Comunicación	RF
Banda de Frecuencia	310 MHz
Poder de Transmisión	20 dBm (100mW)
Rango de Alcance	50 m

Conector de Datos



7 Pines



TABLET LENOVO TAB E7

DISPOSITIVO PARA EL CAMBIO DE PRECIOS



PASOS PARA CONFIGURACIÓN

- 1) Encender los **INDICADORES DE PRECIO** previamente conectados correctamente.
- 2) Encender la Tablet.
- 3) Buscar en las redes Wi-Fi la red (**tótem Full Led**) e ingresar la contraseña **12345678** ó la contraseña personalizada previamente brindada.
- 4) Esperar que nos aparezca un mensaje (**CONEXIÓN SIN ACSESO A INTERNET**) y **PRESIONAR CONTINUAR O ACEPTAR**.

Si no se hace caso o selecciona **CANCELAR**, la red no se conectará debido a que esta **RED NO NECESITA DE CONEXIÓN A INTERNET**.

- 5) Abrir la aplicación **TOTEM FULL LED** en el menú de la Tablet y seleccionar **INGRESAR**.
- 6) Seleccionar el precio a editar e ingresar los nuevos números.

Tenga en cuenta si el precio es 15.49 solo ingresar 1549 o si el precio es 1.35 solo ingresar 135 (**NO USAR PUNTOS**) el punto ya está predeterminado.

INDICADOR DE PRECIO - ESL01

7) Seleccionar con un **CHECK✓** independientemente la opción **FLASH** ubicada en la parte **IZQUIERDA** de cada precio para hacer **PARPADEAR EL PRECIO SELECCIONADO**.


Seleccionar con un **CHECK✓** independientemente la opción **OFF** ubicada en la parte **DERECHA** de cada precio para **APAGAR EL PRECIO SELECCIONADO**.

8) Presionar el botón **ENVIAR** para visualizar los nuevos precios en nuestro tótem.

9) Apagar la Tablet y guardarla (**LA TABLET ES DE USO EXCLUSIVO PARA EL CAMBIO DE PRECIOS**).

NOTA: EL PASO 3 Y 4 SOLO SE REALIZAN LA PRIMERA VEZ, LUEGO LA TABLET AL ENCENDER SE CONECTARÁ AUTOMATICAMENTE CON EL TOTEM.

APLICATIVO FULL-LED

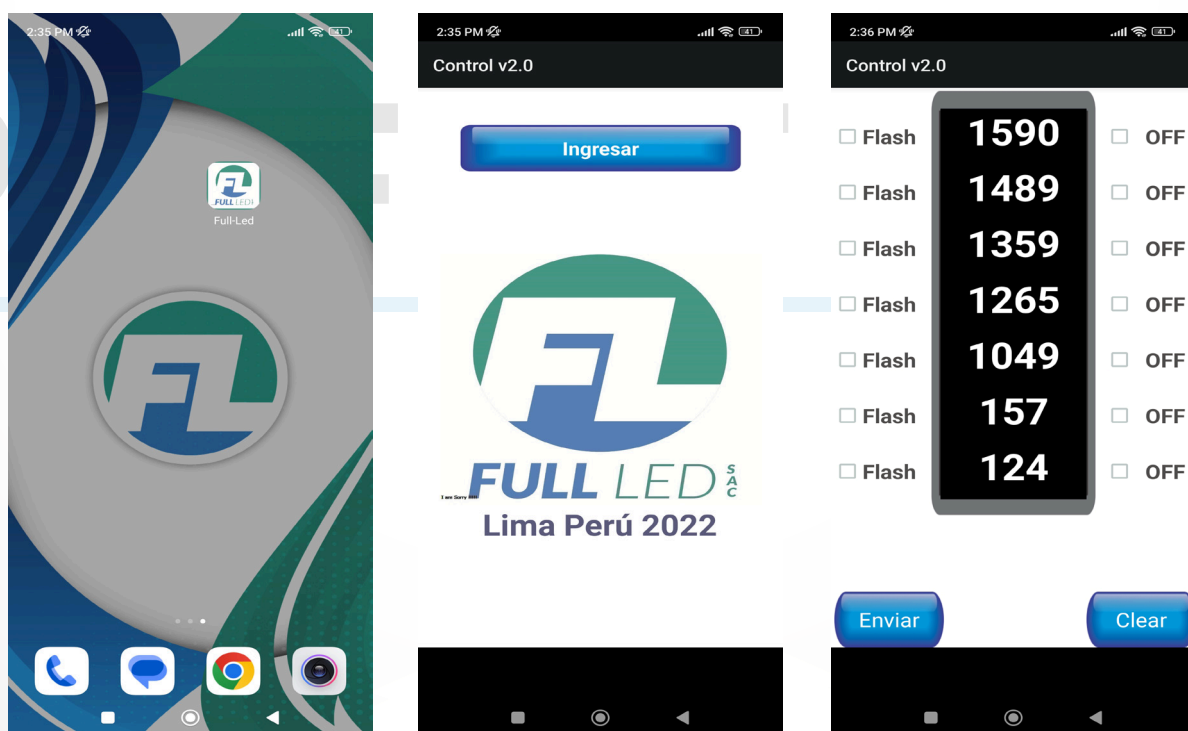

Aplicativo instalado en la Tablet para el cambio de precios.

- Enlace de datos por vía Wi-Fi.
- Logo personalizado de la empresa (ejemplo en foto).
- Cambio de precios global y envío con un solo click.
- Opciones independientes o globales de FLASH (parpadeo).
- Opciones independientes o globales de OFF (apagado).
- Red y contraseña de enlace Wi-Fi personalizado o global para 1 o todos los controles.

INDICADOR DE PRECIO - ESL01

FUENTE HLG-320H-12A PARA USO EN EXTERIOR 12V - 264W



7
AÑOS DE
GARANTÍA

INPUT | **MW** | **HLG-320H-12A** (型号) | **OUTPUT**

Product Name: (中文) 320W 12V LED驱动电源(ESL01-03)
Contact Info: (中文) 010-461-2266 02-2387-3800
Manufacturer: (中文) MEAN WELL Electronic Co., Ltd.
Factory: (中文) 台湾省台中市西屯区文心南路499号

INPUT 100-240V~ 3.5A 50/60Hz
(输入) 277V~ 1.45A 50/60Hz
A:0.95 (277V - for North America only)

OUTPUT +12V = 22A(恒压恒流型)
(输出) 最大电压14Vdc
Rated Power(额定功率): 264W

Suitable for use in Dry, Damp and Wet Locations

LED控制装置


TAIWAN EXCELLENCE 2013

Io ADJ. Vo ADJ.


IP65 SELV $t_c: 90^{\circ}\text{C}$
 $t_a: 50^{\circ}\text{C}$

(RED 正) V+
(BLACK 负) V-

Conector de Alimentación

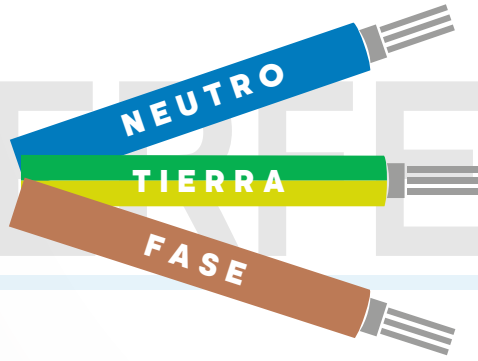

※A-Type

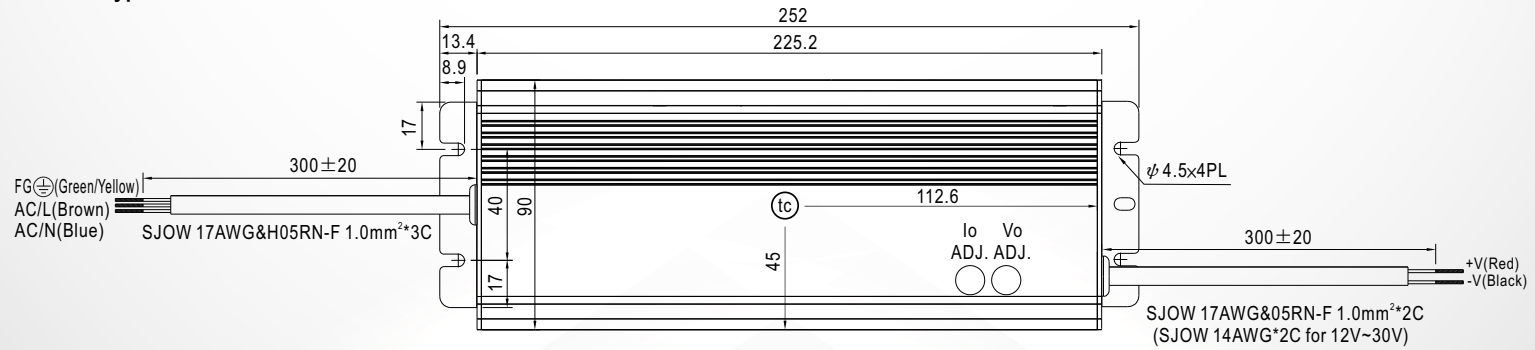

• (tc) : Max. Case Temperature


Dependiendo la instalación y la cantidad de indicadores LED varía el tipo de fuente en base a la potencia requerida en el proyecto cotizado.*

INDICADOR DE PRECIO - ESL01



320W Constant Voltage + Constant Current LED Driver

HLG-320H series

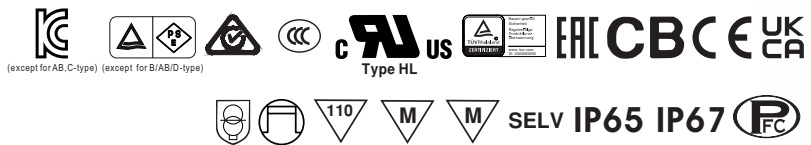

■ Features

- Constant Voltage + Constant Current mode output
- Metal housing with class I design
- Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer; 3 in 1 dimming
- Typical lifetime > 62000 hours
- 7 years warranty

■ Applications

- LED street lighting
- LED high-bay lighting
- Parking space lighting
- LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I , Division 2 hazardous (Classified) location.

■ GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

HLG-320H series is a 320W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-320H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for -40°C ~ +90°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-320H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

HLG - 320H - 15 A

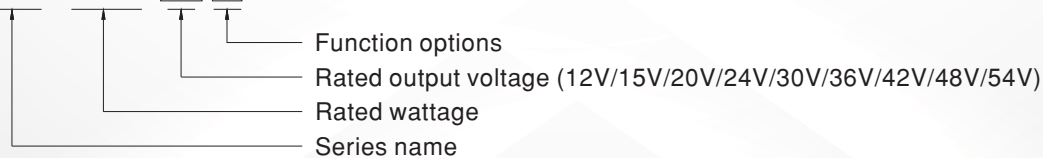

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
A	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
B	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
C	-----	Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.	By request
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request

File Name:HLG-320H-SPEC 2022-02-18

INDICADOR DE PRECIO - ESL01



320W Constant Voltage + Constant Current LED Driver

HLG-320H series

SPECIFICATION

MODEL	HLG-320H-12	HLG-320H-15	HLG-320H-20	HLG-320H-24	HLG-320H-30	HLG-320H-36	HLG-320H-42	HLG-320H-48	HLG-320H-54		
OUTPUT	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V	
	CONSTANT CURRENT REGION Note.4	6 ~ 12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V	
	RATED CURRENT	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A	
	RATED POWER	264W	285W	300W	320.16W	321W	320.4W	321.3W	321.6W	321.3W	
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p	
	VOLTAGE ADJ. RANGE	Adjustable for A/C-Type only (via built-in potentiometer)									
		10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	21 ~ 26V	26 ~ 32V	32 ~ 39V	38 ~ 45V	43 ~ 52V	49 ~ 58V	
	CURRENT ADJ. RANGE	Adjustable for A/AB/C-Type only (via built-in potentiometer)									
		11 ~ 22A	9.5 ~ 19A	7.5 ~ 15A	6.67 ~ 13.34A	5.35 ~ 10.7A	4.45 ~ 8.9A	3.8 ~ 7.65A	3.35 ~ 6.7A	2.97 ~ 5.95A	
	VOLTAGE TOLERANCE Note.3	± 3.0%	± 2.0%	± 1.5%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	
LINE REGULATION	± 0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%		
LOAD REGULATION	± 2.0%	± 1.5%	± 1.0%	± 0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%		
SETUP, RISE TIME Note.6	2500ms, 80ms/115VAC 500ms, 80ms/230VAC										
HOLD UP TIME (Typ.)	15ms / 115VAC, 230VAC										
INPUT	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)									
	FREQUENCY RANGE	47 ~ 63Hz									
	POWER FACTOR (Typ.)	PF ≥ 0.98/115VAC, PF ≥ 0.95/230VAC, PF ≥ 0.94/277VAC @ full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)									
	TOTAL HARMONIC DISTORTION	THD < 20% (@ load ≥ 50% / 115VAC, 230VAC; @ load ≥ 75% / 277VAC) (Please refer to "TOTAL HARMONIC DISTORTION (THD)" section)									
	EFFICIENCY (Typ.) (230Vac)	91%	92.5%	93.5%	94%	94%	94.5%	95%	95%	95%	
	EFFICIENCY (Typ.) (277Vac)	91.5%	93%	94%	94.5%	94.5%	95%	95%	95%	95%	
	AC CURRENT (Typ.)	3.5A / 115VAC 1.65A / 230VAC			1.45A / 277VAC						
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=1010μs measured at 50% Ipeak) at 230VAC; Per NEMA 410									
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	1 unit (circuit breaker of type B) / 2 units (circuit breaker of type C) at 230VAC									
	LEAKAGE CURRENT	< 0.75mA / 277VAC									
PROTECTION	OVER CURRENT Note.4	95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed									
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed									
	OVER VOLTAGE	14 ~ 17V	17.5 ~ 21V	22.5 ~ 27V	27 ~ 33V	33 ~ 37V	40 ~ 46V	46.5 ~ 53V	53.5 ~ 60V	59 ~ 65V	
	OVER TEMPERATURE	Shut down and latch off o/p voltage, re-power on to recover									
ENVIRONMENT	WORKING TEMP.	Tcase= -40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)									
	MAX. CASE TEMP.	Tcase= +90°C									
	WORKING HUMIDITY	20 ~ 95% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH									
	TEMP. COEFFICIENT	± 0.03%/°C (0 ~ 50°C)									
SAFETY & EMC	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes									
	SAFETY STANDARDS	UL8750(type"HL"), CSA C22.2 No. 250.0-08; BS EN/EN/AS/NZS 61347-1, BS EN/EN/AS/NZS 61347-2-13 independent; GB19510.1, GB19510.14; IP65 or IP67 (except for HLG-320H C-type); J61347-1, J61347-2-13 (except for B, AB, C and D-type), EAC TP TC 004; KC61347-1, KC61347-2-13(except for AB, C-type) approved									
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC									
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH									
	EMC EMISSION	Compliance to BS EN/EN55015, BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2 Class C (@ load ≥ 50%) ; BS EN/EN61000-3-3, GB17743 and GB17625.1, EAC TP TC 020									
OTHERS	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2, 3, 4, 5, 6, 8, 11, BS EN/EN61547, BS EN/EN55024, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV), EAC TP TC 020									
	MTBF	1702.2K hrs min. Telcordia SR-332 (Bellcore) ; 157.2K hrs min. MIL-HDBK-217F (25°C)									
	DIMENSION	252*90*43.8mm (L*W*H)									
NOTE	PACKING	1.88Kg; 8pcs/16Kg/0.92CUFT									
		<ol style="list-style-type: none"> All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance : includes set up tolerance, line regulation and load regulation. Please refer to "DRIVING METHODS OF LED MODULE". De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (Tc) point (or TMP, per DLC), is about 75°C or less. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf 									
	* Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx										

File Name:HLG-320H-SPEC 2022-02-18



www.flesac.com



940 410 799 - 974 631 114



@iluminacion.FL